

350-PED Passive OSP Pedestal



Specs and Techs: 350-PED


Description:

The 350-PED has a multi-role back plane with configurations for mid-span access and direct splice drops, pre-terminated drops for both adaptor & hardened connectors and splitter modules. The 350-PED can also be configured with a universal mounting bracket for MST's or Fiber Box applications. This rugged and contractor friendly pedestal is a game changer in the FTTX world.

Features and Benefits: 350-PED

- Rugged Ped Base will not heave or shift, if placed properly, due to the waffled exterior.
- No Ped Stake required.
- 14"x17" (356mm x 432mm) base can house slack drop cable.
- Removable front panels allow for easy installation of conduit or direct bury fiber.
- Rodent proof lid and collar.
- Multi use back planes; Direct splice, Connectorized adaptors and Opti-Tap, MST's, Fiber closures & Splitter Modules
- 350-PED can go to as low as -40°C (-40°F) in extreme conditions.
- Product is designed to conform with ANSI Specifications.

350-PED-DS (Direct Splice) configuration

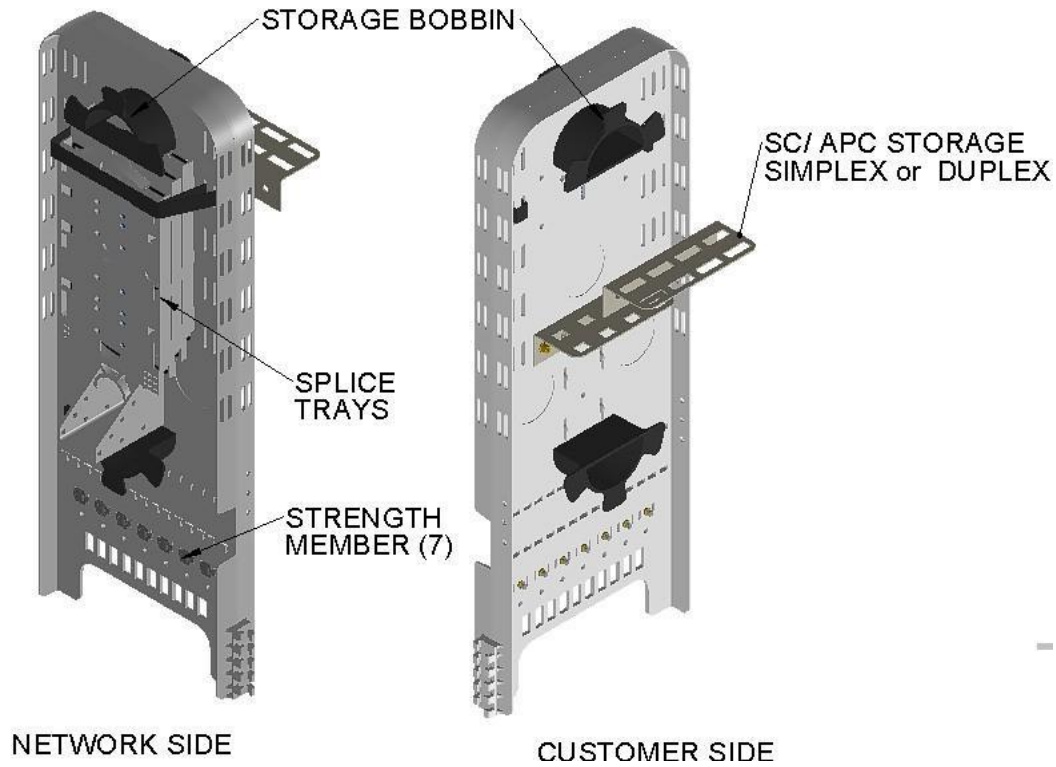

For more information on BABA compliance please visit: <https://www.infratecgroup.com/baba>

Revision: July 2025