




Specs and Techs: 350-PED Passive OSP Pedestal (Max 10)

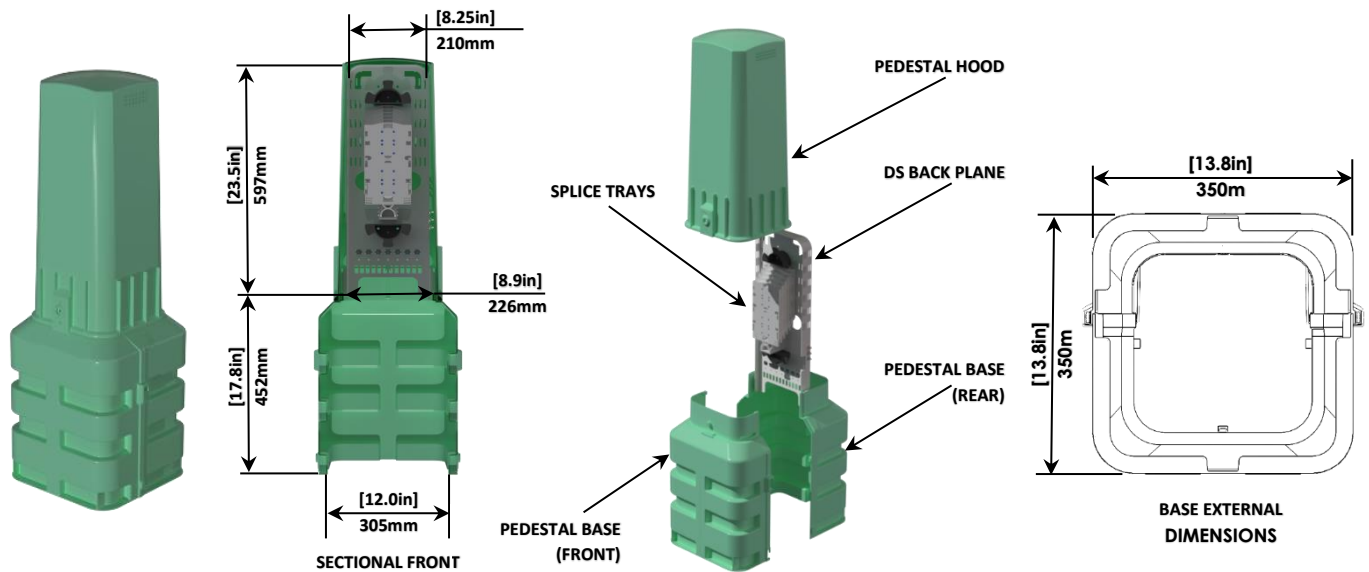

BABA COMPLIANT PRODUCT

Description


The Max 10 Passive OSP Pedestal is a robust, high-performance enclosure engineered for modern fibre optic networks. Combining structural strength, equipment protection and flexible internal configuration, it supports a wide range of fibre management applications including splice trays, connectorized adaptors, splitter modules and other modular network components. Its contractor-friendly design simplifies installation while providing generous fibre routing and capacity for future network expansion.

Key Features

- UV-Stabilised pedestal base and hood for long-term outdoor service.
- Removable front base panel for conduit and direct-buried fibre access.
- Dual mounting system for Direct Splice (DS) and MST backplanes.
- Supports splice trays, connectorized adaptors, splitter modules and fibre closures.
- Large base provides slack cable storage and expansion capacity.
- Re-enterable design for installation, maintenance and upgrades.
- Rodent-resistant hood and base.
- Secure 1/4-turn locking system.

Performance

- Designed for long-term outdoor telecommunications service.
- Photo and corrosion resistant polymer.
- Sub -zero operating temperatures.
- High impact resistance for handling and installation.
- Complies with applicable ANSI specifications.

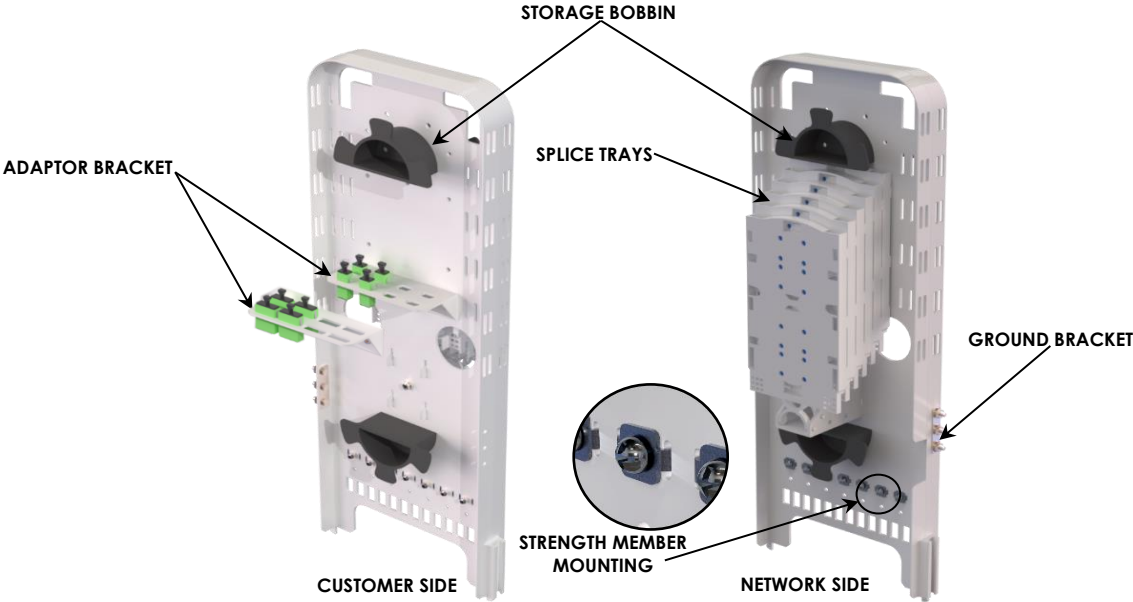

Back(Direct Splice)